


**NOTES**

1. ALL PLUGS SHALL BE CONCRETE OR BRICK AND MORTAR.
2. SIDE SEWERS LARGER THAN 6" IN DIAMETER SHALL BE PLUGGED AND FILLED WITH EITHER SLURRY AS SPECIFIED IN SECTION 302 OF THE STANDARD SPECIFICATIONS OR PER CONTRACT DOCUMENTS.

This Standard Plan was developed for use on public works projects in the City and County of San Francisco, and shall not be used without consulting a Registered Professional Engineer. The Department of Public Works reserves the right to make revisions to this Standard Plan at any time.

NO.	DATE	DESCRIPTION	BY	APP.
TABLE OF REVISIONS				
CHECK WITH TRACING TO SEE IF YOU HAVE LATEST REVISION				

REFERENCE INFORMATION & FILE NO. OF SURVEYS

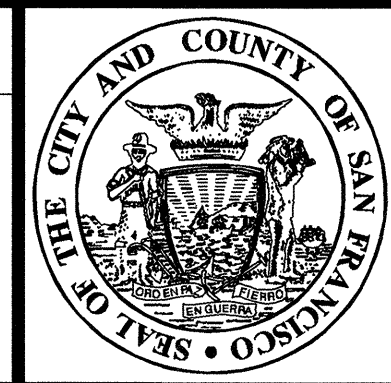

**BUREAU OF ENGINEERING**  
**DEPARTMENT OF PUBLIC WORKS**  
**CITY AND COUNTY OF SAN FRANCISCO**

REVIEWED:	DATE:	PLANS APPROVAL DATE:	APRIL 30, 2007
ID	12/2006	<i>Sam Si</i>	4/30/07
DRAWN:	DATE:		SECTION MANAGER
AM	07/2003	<i>Mh</i>	4/30/07
CHECKED:	DATE:		DEPUTY BUREAU MANAGER
KS	12/200	<i>Sam Liu</i>	BUREAU MANAGER

<b>STANDARD PLAN</b>
<b>HYDRAULICS</b>
<b>ABANDONMENT OF EXISTING SIDE SEWER</b>

OLD FILE NO.	L-38,782 CH 1
FILE NO.	87,198
REV. NO.	

Drawing Path: V:\0966\Standard Plans & Specs Update\2\_Plans\FINAL\HYD\SP-87198.dwg, Login: carantos  
 Xrefs: V:\0966\Standard Plans & Specs Update\2\_Plans\Title\_Block\BOE STD Title Block.dwg  
 Dimension Scale: 40  
 Model Units: Feet  
 Plot Time: Fri, 27 Apr 2007 - 7:05pm